

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number
WO 2004/053187 A1

(51) International Patent Classification⁷: **C23C 16/46**,
C30B 25/12, 25/10, 31/12, H05B 6/02, F27B 14/06, H01L
21/00

(21) International Application Number:
PCT/IT2002/000773

(22) International Filing Date:
10 December 2002 (10.12.2002)

(25) Filing Language: Italian

(26) Publication Language: English

(71) Applicant (for all designated States except US): **ETC SRL**
[IT/IT]; Corso Italia, 207, I-95127 Catania (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MACCALLI**,
Giacomo, Nicolao [IT/IT]; Via Baranzate, 1, I-20026
Novate Milanese (IT). **KORDINA, Oile** [SE/US]; 328
Shore Drive E., Oldsmar, FL 34677 (US). **VALENTE**,
Gianluca [IT/IT]; Viale Monza, 76, I-20127 Milano (IT).
CRIPPA, Danilo [IT/IT]; Via Crimea, 24, I-28100 Novara
(IT). **PRETI, Franco** [IT/IT]; Via S. Benigno, 4, I-20133
Milano (IT).

(74) Agent: **FERRONI, Filippo**; Dragotti & Associati Srl,
Galleria San Babila 4/C, I-20122 Milano (IT).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN,
YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

[Continued on next page]

(54) Title: SUSCEPTOR SYSTEM

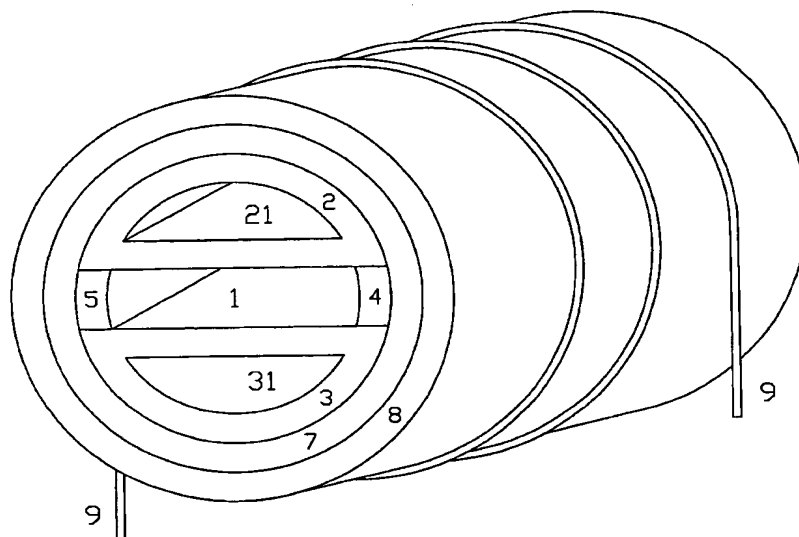

(57) Abstract: The present invention relates to a susceptor system for an apparatus for the treatment of substrates and/or wafers, provided with a treatment chamber (1) delimited by at least two walls and with at least one heating solenoid (9); the susceptor system comprises at least one susceptor element (2, 3) delimited by an outer surface and made of electrically conducting material suitable for being heated by electromagnetic induction; the susceptor element (2, 3) is hollow; a first portion of the outer surface of the susceptor element (2, 3) is suitable for acting as a wall of the treatment chamber (1); a second portion of the outer surface of the susceptor element (2, 3) is suitable for being disposed close to the heating solenoid (9).

WO 2004/053187 A1

WO 2004/053187 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

SUSCEPTOR SYSTEM

The present invention relates to a susceptor system for an apparatus for the treatment of substrates and/or wafers.

In order to produce integrated circuits, it is necessary to treat substrates and/or wafers; these may be made of a single material (semiconducting or insulating) or of several materials (conducting, semiconducting and insulating); the term "substrate" and the term "wafer" often refer in practice to the same thing, that is, a thin element which is very often disc-shaped; the former term is usually used when the element serves basically solely for supporting layers or structures of semiconducting material; the second is usually used in all other cases.

There are purely thermal treatments and chemical/physical treatments which involve heating.

In general, in order to grow semiconducting materials (Si, Ge, SiGe, GaAs, AlN, GaN, SiC, ..) epitaxially on substrates, high temperatures are required if the quality of the material grown is to be suitable for microelectronic applications. For semiconducting materials such as silicon, temperatures typically of from 1000°C to 1100°C are used. For semiconducting materials such as silicon carbide, even higher temperatures are required; in particular, temperatures typically of from 1500°C to 2000°C are used.

A reactor for the epitaxial growth of silicon carbide or similar material therefore requires, amongst other things, a system which generates heat so that these temperatures can be achieved inside a reaction chamber; naturally it is desirable for the system to generate heat not only effectively but also efficiently. For these reasons reaction chambers with hot walls are used in reactors of these types.

One of the most suitable methods of heating the walls of a reaction chamber is the method based on electromagnetic induction; an element made of conducting material, an inductor, and an alternating electrical current (having a frequency typically of between 2 kHz and 20 kHz) are provided, the electrical current is caused to flow in the inductor so as to generate a variable magnetic field, the element is positioned in a manner such that it is immersed in the variable magnetic field; the electrical currents induced in the element because of the

variable magnetic field cause heating of the element by the Joule effect; a heating element of this type is known as a susceptor and can be used directly as a wall of the reaction chamber, if suitable materials are used.

A reactor for the epitaxial growth of silicon carbide or similar material also requires the reaction chamber to be well insulated thermally from the outside environment particularly to limit heat losses, and to be well sealed to prevent, on the one hand, dispersal of reaction gases contaminating the outside environment and, on the other hand, entry of gases from the outside environment contaminating the reaction environment.

Some known susceptors suitable for use in reactors for the growth of silicon carbide are described briefly below.

American patent US 5,879,462 describes a cylindrical susceptor (of circular cross-section) which has an internal cavity (which acts as a reaction chamber), extending in a longitudinal direction and having a substantially rectangular cross-section; this susceptor is made entirely of silicon carbide in powder form; heating takes place by means which surround the susceptor and radiate a radiofrequency field.

American patent US 5,674,320 describes a cylindrical susceptor (of substantially elliptical cross-section) which has two internal cavities (which act as reaction chambers) extending in a longitudinal direction and having identical and substantially rectangular cross-sections; this susceptor can be formed as a single piece or in two identical pieces each of which has an internal cavity; the pieces of the susceptor are made of graphite and are coated with a layer of silicon carbide; in the two-piece susceptor, the pieces are joined together mechanically by means of graphite screws and are electrically insulated from one another, in particular by the layer of silicon carbide; heating takes place by electromagnetic induction by means which surround the susceptor: the electrical currents induced in the graphite flow all around each cavity.

American patent US 5,695,567 describes a prismatic susceptor (of hexagonal cross-section) which has an internal cavity (which acts as a reaction chamber), extending in a longitudinal direction and having a rectangular cross-section; this

susceptor is made in four pieces; the pieces of the susceptor are made of graphite and are coated with a layer of silicon carbide; the pieces are joined to one another mechanically by means of graphite screws; two silicon carbide plates cover the upper and lower pieces of the susceptor so as to separate the side pieces from the upper and lower pieces; heating takes place by electromagnetic induction by means which surround the susceptor; the electrical currents induced in the graphite flow within each piece which delimits the cavity.

The object of the present invention is to provide a susceptor system for an apparatus for the treatment of substrates and/or wafers, which is suitable for being heated by electromagnetic induction by means of a solenoid, which heats the treatment chamber uniformly, effectively and efficiently and, in particular, which has a low thermal inertia but a good heating capacity, and which is also of simple construction.

This object is achieved by the susceptor system having the characteristics set out in independent Claim 1.

The concept upon which the present invention is based is that of using a susceptor element that is hollow and shaped in a manner such that a portion thereof is disposed close to the chamber for the treatment of the substrates and/or wafers (for good thermal exchange) and a portion thereof is disposed close to the solenoid (for good magnetic coupling).

Advantageous characteristics of the susceptor system according to the present invention are set out in the claims that are directly or indirectly dependent on Claim 1.

According to a further aspect, the present invention also relates to an apparatus for treating substrates and/or wafers having the characteristics set out in independent Claim 15.

Advantageous characteristics of the apparatus according to the present invention are set out in the claims that are directly or indirectly dependent on Claim 15.

The present invention will become clearer from the following description which is to be considered jointly with the appended drawings, in which:

Figure 1 is a schematic, axonometric view of a susceptor system according to the present invention, with some additional elements,

Figure 2 is a schematic view showing, in section, a first embodiment of the susceptor system according to the present invention,

Figure 3 is a schematic view showing, in section, a second embodiment of the susceptor system according to the present invention,

Figure 4 is a schematic view showing, in section, a third embodiment of the susceptor system according to the present invention,

Figure 5 is a schematic view showing, in section, a fourth embodiment of the susceptor system according to the present invention, and

Figures 6A and 6B are schematic, axonometric views of the lower wall of a susceptor system according to the present invention provided with a slide, with the slide fully inserted and with the slide removed, respectively.

The present invention will be described below with reference to the embodiments shown in the drawings but is not limited to these embodiments.

The susceptor system according to the present invention is designed specifically for an apparatus for the treatment of substrates and/or wafers, provided with a treatment chamber delimited by at least two walls and with at least one heating solenoid; it comprises at least one susceptor element having the characteristics that it is delimited by an outer surface and that it is made of electrically conducting material suitable for being heated by electromagnetic induction; one or more of the susceptor elements with these characteristics is hollow, has a first portion of its outer surface which is suitable for acting as a wall of the treatment chamber, and has a second portion of its outer surface which is suitable for being disposed close to the heating solenoid.

With reference to Figure 1, the treatment chamber is indicated 1 and the solenoid is indicated 9; in the embodiment of Figure 1, there are two hollow susceptor elements made of electrically conducting material and indicated 2 and 3, and two non-hollow susceptor elements, indicated 4 and 5; each of the susceptor elements 2, 3, 4, 5 has a first portion of its outer surface which is suitable for acting as a

wall of the treatment chamber 1 and has a second portion of its outer surface which is suitable for being disposed close to the heating solenoid 9.

With this arrangement, the susceptor element can be shaped in a manner such that a portion thereof is disposed close to the treatment chamber, which leads to a good thermal exchange, and a portion thereof is disposed close to the solenoid, which leads to good magnetic coupling; substantially all of the induced current circulates in both of the portions since the hollow susceptor element constitutes, from an electrical point of view, substantially a mesh and, very importantly, substantially all of the induced current (which causes heating) circulates in the immediate vicinity of the treatment chamber; by virtue of the fact that the susceptor element is hollow, its mass is notably low and its thermal inertia is consequently notably low.

The portion of the outer surface of the susceptor element which acts as a wall of the treatment chamber must be such as to withstand high temperatures and the aggressive environment of the treatment chamber; to facilitate this function, the susceptor element may advantageously be provided with thermal and chemical protection, at least in this area.

This protection may be constituted by at least one surface layer of inert and refractory material internal to the susceptor element; this is the case in the hollow susceptor elements 2 and 3 of the embodiments of Figure 2 and Figure 3; in both embodiments, the layer extends beyond the limits of the treatment chamber.

Alternatively, this protection may be constituted by at least one plate made of inert and refractory material adjacent the outer surface of the susceptor element; this is the case for the hollow susceptor elements 2 and 3 of Figure 4 and Figure 5; in both embodiments, the plate extends beyond the limits of the treatment chamber.

Moreover, the protection may alternatively be constituted by a combination of at least one surface layer of inert and refractory material internal to the susceptor element and at least one plate made of inert and refractory material adjacent the outer surface of the susceptor element.

Since electrical currents (induced by the solenoid) flow through the susceptor elements, it may be advantageous in some cases for the inert and refractory

material of the layer and/or of the plate also to be electrically insulating so as to prevent electrical sparks in the treatment chamber and/or electrical leakages.

A substance which is particularly suitable for producing susceptor elements made of conducting material is graphite; however, graphite cannot withstand the typical environment of a treatment chamber and therefore has to be protected by material that is more resistant from the chemical and thermal points of view. Protection of the graphite is strictly necessary only in the areas that are adjacent the chamber, but it may sometimes be more convenient and/or advantageous to produce complete protections or at least beyond the necessary minimum.

A compound suitable for producing the protective layer and/or the plate is silicon carbide; however, if the chamber is also used for the epitaxial growth of silicon carbide, it is preferable to use even more resistant compounds such as niobium carbide, boron carbide, or tantalum carbide; amongst other things, the latter two compounds also have the property of being electrical conductors.

Other compounds usable to produce the protective layer and/or the plate are some nitrides; amongst these, silicon nitride, aluminium nitride and, in particular, boron nitride may be mentioned. Nitrides are to be used with great care if, for example, silicon carbide is to be treated in the chamber; in fact, if nitrogen atoms should become detached from the coating layer, they would dope the silicon carbide.

If the layer and/or the plate is to be made of electrically conducting material, tantalum carbide or boron carbide, for example, may be used.

It should be explained that the above-mentioned chemical substances have physical properties which depend on their allotropic form and also on the production process; for example, carbon, silicon carbide, and boron nitride have more than one stable allotropic form, with quite different physical properties; again, for example, with graphite it is possible to produce materials with good thermal and electrical conductivity and materials with poor thermal and electrical conductivity; finally, the addition of chemical compounds to a material can modify some of its physical properties.

The protective layer may be produced basically in two ways: by chemical reaction, or by physical application. For example, a layer made of a carbide can generally be produced more easily by chemical reaction on a graphite piece. There are companies that are specialized in producing such layers.

As far as the thickness of the protective layer is concerned, for silicon carbide, it may be, for example, 100 μm and for tantalum carbide, for example 20 μm ; the thickness to be used may depend, amongst other things, on the properties of the material and on the function required.

Advantageously, the susceptor element may be made hollow so as to have at least one hole, preferably a through-hole, which extends in a longitudinal direction; the induced currents are thus necessarily confined to the peripheral region and therefore necessarily flow very close to the treatment chamber; this is the case in all of the embodiments shown in the drawings, in which the susceptor element 2 has a through-hole 21 and the susceptor element 3 has a through-hole 31. In fact, the number of through-holes for each susceptor element may be greater than one, but the effect does not change substantially.

All of the embodiments shown in the drawings comprise two hollow susceptor elements 2, 3; a first portion of the outer surface of one of the two susceptor elements and a first portion of the outer surface of the other of the two susceptor elements are suitable for acting as an upper wall and as a lower wall of the treatment chamber 1, respectively; a second portion of the outer surface of one of the two susceptor elements and a second portion of the outer surface of the other of the two susceptor elements are suitable for being disposed close to the heating solenoid 9; the advantages are thus doubled quantitatively.

Two walls, if they are suitably shaped, are sufficient to delimit a treatment chamber completely (at the top and at the bottom). In all of the embodiments shown in the drawings, however, it is preferred further to include two susceptor elements 4, 5 which are suitable for acting as a right-hand side wall and as a left-hand side wall of the treatment chamber 1, respectively.

Even when the susceptor system according to the present invention is constituted by four susceptor elements, as in all of the embodiments shown in the drawings,

its construction is nevertheless very simple; in fact, the walls can simply be placed close together and inserted in a suitable compartment, as shown in Figure 1; the structure of the susceptor system may, however, be rendered firmer by means of simple longitudinal ribs and/or grooves for the mutual coupling of the elements.

These side susceptor elements may be made of electrically insulating material which, in addition, is inert and refractory; they can thus withstand the high temperatures and the aggressive environment of the treatment chamber and, at the same time, can prevent electrical leakages of the currents which circulate in the hollow susceptors and reduce the likelihood of electrical sparks.

A compound which is particularly suitable for the production of the side susceptor elements is silicon carbide; in this case, moreover, they conduct heat well and thus achieve good passive heating.

Another compound which is particularly suitable for producing the side susceptor elements is boron nitride; in this case also, they conduct heat well and thus achieve good passive heating; in fact this compound has a hexagonal allotropic form with physical properties similar to those of graphite and a cubic allotropic form with physical properties similar to those of diamond; one or other allotropic form can be produced, according to the production process.

Alternatively, the side susceptor elements may be made of electrically conducting material and contribute actively to the heating of the treatment chamber. In this case also, the portion of their surface which is adjacent the treatment chamber must be such as to withstand the high temperatures and the aggressive environment of the treatment chamber; to facilitate this function, these susceptor elements may advantageously be provided with thermal and chemical protection, at least in this area.

In the embodiments of Figure 3 and of Figure 4, the side susceptor elements 4 and 5 are provided with protection constituted by at least one surface layer of inert and refractory material internal to the susceptor element.

In the embodiment of Figure 5, the side susceptor elements 4 and 5 are provided with protection constituted by at least one plate of inert and refractory material adjacent the surface of the susceptor element.

According to how the susceptor elements 2 and 3 are made, the protection for the side susceptor elements may be made of electrically conducting or electrically insulating material.

If the side susceptor elements are not used as a main source of heating of the treatment chamber, it is simpler and therefore advantageous if they are not hollow; in this case, the side susceptor elements are much smaller than the upper and lower susceptor elements; this is the case in all of the embodiments shown in the drawings.

An optimal geometrical solution, which is common to all of the embodiments shown in the drawings, consists of hollow susceptor elements which extend substantially uniformly in a longitudinal direction and which have cross-sections having the external shape substantially of a segment of a circle or ellipse, and of non-hollow susceptor elements which extend substantially uniformly in the longitudinal direction and which have cross-sections of substantially rectangular or trapezoidal shape.

A susceptor system of this type is typically usable in an apparatus of the type suitable for treating substrates and/or wafers; this is a further aspect of the present invention.

The apparatus according to the present invention will be described below with non-limiting reference to Figure 1.

The apparatus according to the present invention is provided with a treatment chamber delimited by at least two walls and comprises, essentially a susceptor system with a hollow susceptor element adjacent the treatment chamber and at least one solenoid which is wound around the susceptor system and the treatment chamber and is suitable for heating the susceptor system by electromagnetic induction.

In Figure 1, the treatment chamber is indicated 1; the susceptor system is composed of four susceptor elements, indicated 2, 3, 4, 5, of which two, that is the elements 2 and 3, are hollow; the solenoid is indicated 9.

Advantageously, the susceptor system extends in the apparatus in the longitudinal direction and the external shape of the cross-section of the susceptor system according to the present invention is substantially uniform in the longitudinal direction and is substantially circular or substantially elliptical; the susceptor system is in fact thus easy to produce and can easily be coupled well with a solenoid for heating it.

The shape of the cross-section of the treatment chamber of the apparatus, is also advantageously substantially uniform in the longitudinal direction; practical implementation is in fact thus simplified.

In known reactors, the cross-section of the chamber reduces in the longitudinal direction to compensate for the reduced concentration of the precursors. Instead, the present invention solves this problem by causing the substrates or wafers to rotate and using a high flow of reaction gas; this high gas-flow also has the advantage of effectively and quickly removing any solid particles from the reaction chamber.

The average width of treatment chamber, is preferably at least three times, even more preferably at least five times, the average height of the treatment chamber; the heating of the treatment chamber is in fact thus due to a greater extent to the walls of the hollow susceptor elements.

The apparatus according to the present invention may advantageously comprise a first structure 7 which surrounds the treatment chamber 1 and the susceptor system 2, 3, 4, 5 and which is constituted, substantially, by a tube of refractory and thermally insulating material which extends in a longitudinal direction; in this case, the solenoid 9 is wound around the first structure 7.

The apparatus according to the present invention may also advantageously comprise a second, hermetic structure 8 suitable for surrounding the first structure 7; in this case, the solenoid 9 is also wound around the second structure 8.

These structures may be formed as single pieces or in several pieces, suitably joined together.

If the susceptor system of the apparatus has walls provided with through-holes, as in the embodiments shown in the drawings, the apparatus may advantageously comprise means suitable for causing at least one gas-flow to flow within at least one of the holes; the gas-flow may serve to remove any particles which are detached from the internal walls of the hole; the gas-flow may also serve to modify the temperature of the susceptor system slightly; argon or, more generally, an inert gas, is suitable in particular for the former function; hydrogen, for example, is suitable in particular for the latter function and, more particularly, for cooling.

The apparatus according to the present invention may advantageously comprise a slide, indicated 6 in Figure 6A, mounted within the treatment chamber, and suitable for supporting at least one substrate or at least one wafer; the slide can slide in guided manner in the longitudinal direction; operations to insert and remove substrates or wafers are thus facilitated; in fact the substrates or wafers are manipulated outside the treatment chamber and are inserted and removed by the movement of the slide.

In practice, it is convenient to arrange for the susceptor system (in the embodiment of Figure 6, the lower susceptor element 3) to have a guide, indicated 32 in Figure 6B, which is suitable for receiving the slide, indicated 6 in Figure 6A, and which extends in the longitudinal direction in a manner such that the slide can slide along the guide. In the embodiment of Figure 6, the guide 32 is formed entirely within the susceptor element 3 and the slide 6 has a flat upper surface that is substantially aligned with the flat upper surface of the susceptor element 3; the effective cross-section of the treatment chamber 1 is thus substantially rectangular and regular (as if the slide 6 were not provided).

To achieve a more uniform treatment of the substrates or wafers, the slide may comprise at least one disc suitable for supporting at least one substrate or at least one wafer and may be provided with a recess for housing the disc rotatably; in the embodiment of Figure 6, the slide 6 comprises a single disc, indicated 61 in Figure

6A, and is provided with a corresponding recess, indicated 62 in Figure 6A, for housing it.

The apparatus according to the present invention can be used, with the addition of further components, as a reactor for the epitaxial growth of silicon carbide or similar material on substrates.

Silicon carbide is a semiconducting material which is very promising but also very difficult to handle; most of the characteristics set out above are designed particularly for this use and for this material.

The apparatus according to the present invention may also be used, with the addition of further components, as apparatus for the high-temperature thermal treatment of wafers.

Claims

1. A susceptor system for an apparatus for the treatment of substrates and/or wafers, provided with a treatment chamber (1) delimited by at least two walls and with at least one heating solenoid (9), comprising at least one susceptor element (2, 3) delimited by an outer surface and made of electrically conducting material suitable for being heated by electromagnetic induction, characterized in that the at least one susceptor element (2, 3) is hollow, in that a first portion of the outer surface of the at least one susceptor element (2, 3) is suitable for acting as a wall of the treatment chamber (1), and in that a second portion of the outer surface of the at least one susceptor element (2, 3) is suitable for being disposed close to the heating solenoid (9).
2. A susceptor system according to Claim 1, in which the at least one susceptor element (2, 3) is provided with thermal and chemical protection at least on the first portion of the outer surface.
3. A susceptor system according to Claim 2 in which the protection is constituted by at least a surface layer of inert and refractory material internal to the at least one susceptor element (2, 3).
4. A susceptor system according to Claim 2 in which the protection is constituted by at least one plate of inert and refractory material adjacent the outer surface of the at least one susceptor element (2, 3).
5. A susceptor system according to Claim 2 in which the protection is constituted by a combination of at least one surface layer of inert and refractory material internal to the at least one susceptor element (2, 3) and at least one plate of inert and refractory material adjacent the outer surface of the at least one susceptor element (2, 3).
6. A susceptor system according to any one of Claims 3 to 5, in which the inert and refractory material is also electrically insulating.
7. A susceptor system according to any one of the preceding claims in which the at least one susceptor element (2, 3) is hollow so as to have at least one hole (21, 31), preferably a through-hole, which extends in a longitudinal direction.

8. A susceptor system according to any one of the preceding claims, comprising two hollow susceptor elements (2, 3) in which a first portion of the outer surface of one (2) of the two susceptor elements and a first portion of the outer surface of the other (3) of the two susceptor elements are suitable for acting as an upper wall and as a lower wall of the treatment chamber (1), respectively, and in which a second portion of the outer surface of one (2) of the two susceptor elements and a second portion of the outer surface of the other (3) of the two susceptor elements are suitable for being disposed close to the heating solenoid (9).
9. A susceptor system according to Claim 8, further comprising two susceptor elements (4, 5) made of electrically insulating and also inert and refractory material and suitable for acting as a right-hand side wall and as a left-hand side wall of the treatment chamber (1), respectively.
10. A susceptor system according to Claim 8, further comprising two susceptor elements (4, 5) made of electrically conducting material and suitable for acting as a right-hand side wall and as a left-hand side wall of the treatment chamber (1), respectively.
11. A susceptor system according to Claim 10 in which the side susceptor elements (4, 5) are provided with thermal and chemical protection at least on the portion of their surface that is adjacent the treatment chamber (1).
12. A susceptor system according to any one of Claims 9, 10 and 11 in which the side susceptor elements (4, 5) are not hollow.
13. A susceptor system according to any one of the preceding claims in which at least one of the hollow susceptor elements (2, 3) extends substantially uniformly in a longitudinal direction and has a cross-section having the external shape substantially of a segment of a circle or ellipse.
14. A susceptor system according to any one of the preceding claims in which at least one of the non-hollow susceptor elements (4, 5) extends substantially uniformly in a longitudinal direction and has a cross-section having a substantially rectangular or trapezoidal external shape.
15. Apparatus of the type suitable for treating substrates and/or wafers, provided with a treatment chamber (1) delimited by at least two walls, characterized in that

it comprises a susceptor system (2, 3, 4, 5) according to any one of Claims 1 to 14 adjacent the treatment chamber (1) and at least one solenoid (9) which is wound around the susceptor system (2, 3, 4, 5) and the treatment chamber (1) and is suitable for heating the susceptor system by electromagnetic induction.

16. Apparatus according to Claim 15 in which the susceptor system (2, 3, 4, 5) extends in a longitudinal direction, and in which the external shape of the cross-section of the susceptor system (2, 3, 4, 5) is substantially uniform in the longitudinal direction and is substantially circular or elliptical.

17. Apparatus according to Claim 15 or Claim 16 in which the treatment chamber (1) extends in a longitudinal direction and in which the shape of the cross-section of the treatment chamber (1) is substantially uniform in the longitudinal direction.

18. Apparatus according to Claim 17 in which the average width of the treatment chamber (1) is at least three times, preferably at least five times the average height of the treatment chamber (1).

19. Apparatus according to any one of Claims 15 to 18, comprising a first structure (7) which surrounds the treatment chamber (1) and the susceptor system (2, 3, 4, 5) and which is constituted substantially by a tube of refractory and thermally insulating material which extends in a longitudinal direction, and in which the solenoid (9) is wound around the first structure (7).

20. Apparatus according to Claim 19, comprising a second, hermetic structure (8) suitable for surrounding the first structure (7), and in which the solenoid (9) is also wound around the second structure (8).

21. Apparatus according to any one of Claims 15 to 20, comprising means for causing at least one gas-flow to flow in at least one through-hole (21, 31) of the susceptor system (2, 3, 4, 5).

22. Apparatus according to any one of Claims 15 to 21, comprising a slide (6) mounted inside the treatment chamber (1) and suitable for supporting at least one substrate or at least one wafer, the slide (6) being slidable in guided manner in the longitudinal direction.

23. Apparatus according to Claim 22 in which the susceptor system (2, 3, 4,5) has a guide (32) which is suitable for receiving the slide (6) and which extends in the longitudinal direction so that the slide (6) can slide along the guide (32).
24. Apparatus according to Claim 22 or Claim 23 in which the slide (6) comprises at least one disc (61) suitable for supporting at least one substrate or at least one wafer, and is provided with a recess (62) suitable for housing the disc (61) rotatably.
25. Apparatus according to any one of Claims 15 to 24, characterized in that it is a reactor for the epitaxial growth of silicon carbide or similar material on substrates.
26. Apparatus according to any one of Claims 15 to 24, characterized in that it is an apparatus for the high-temperature thermal treatment of wafers.

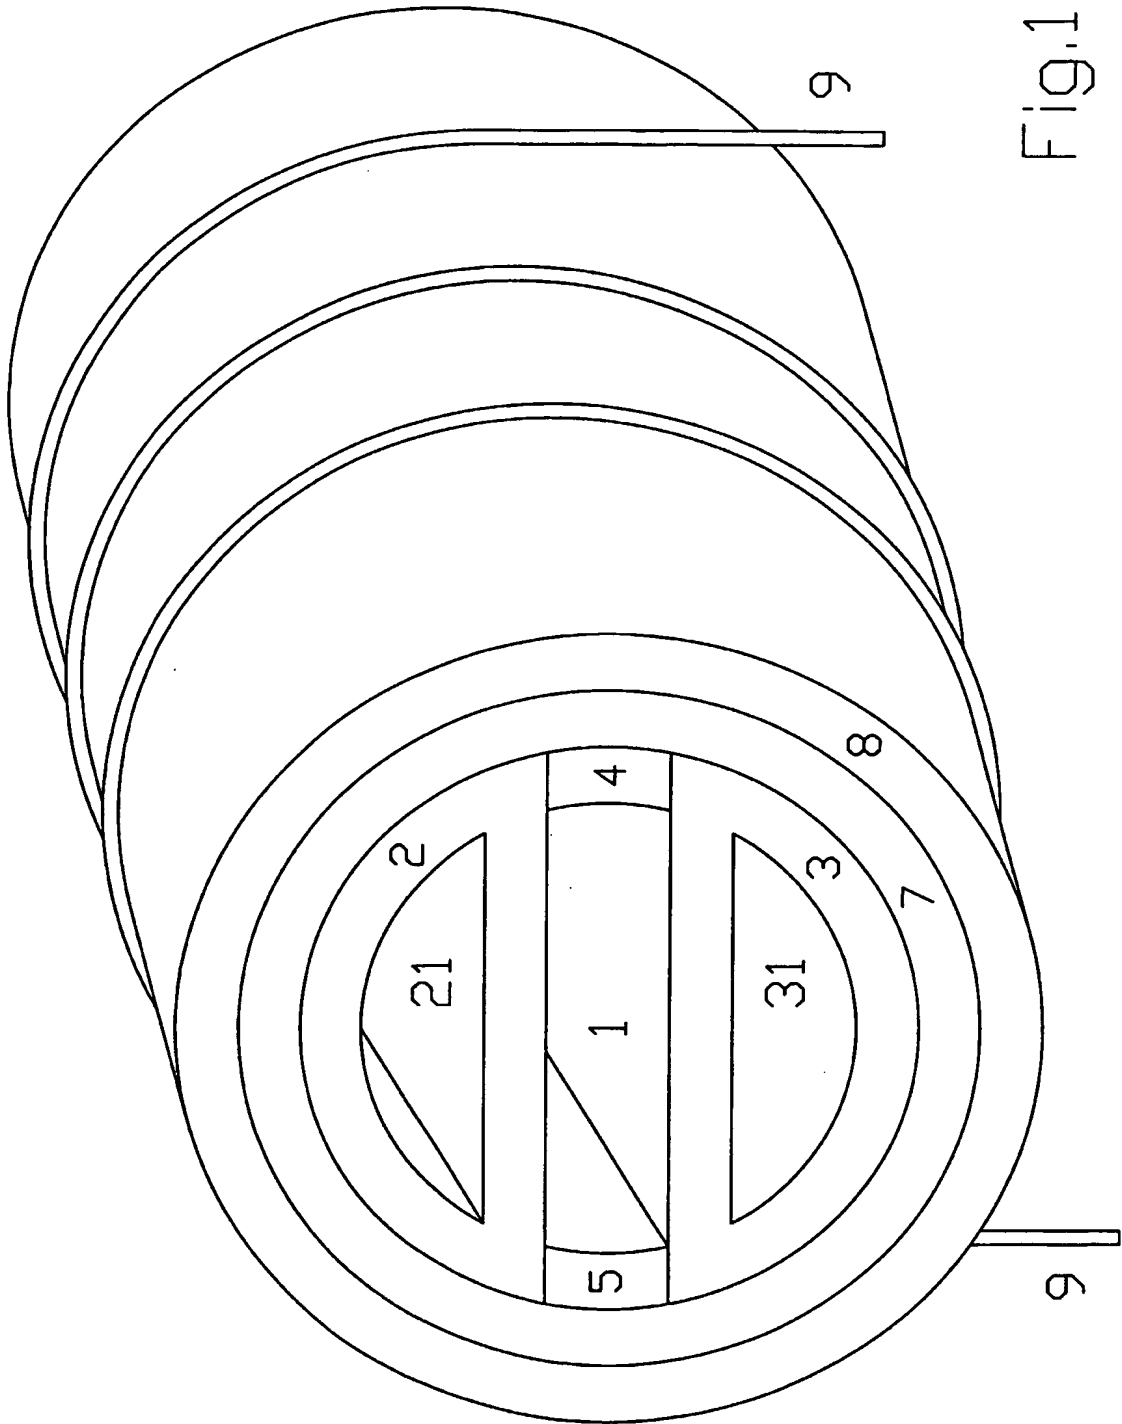


Fig.1

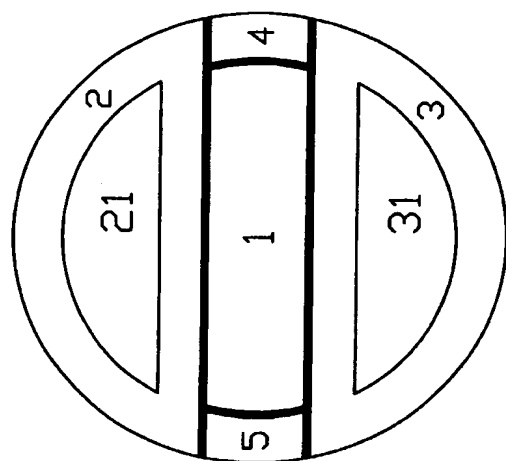


Fig. 3

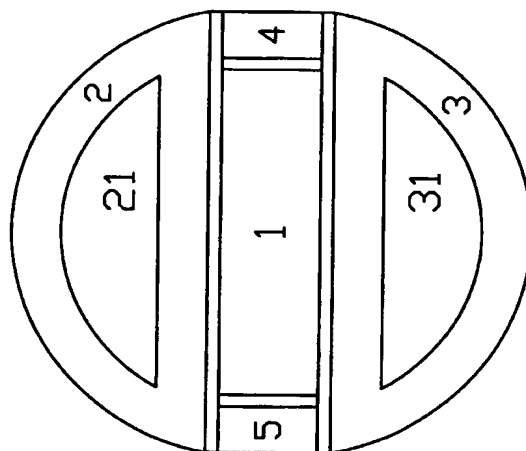


Fig. 5

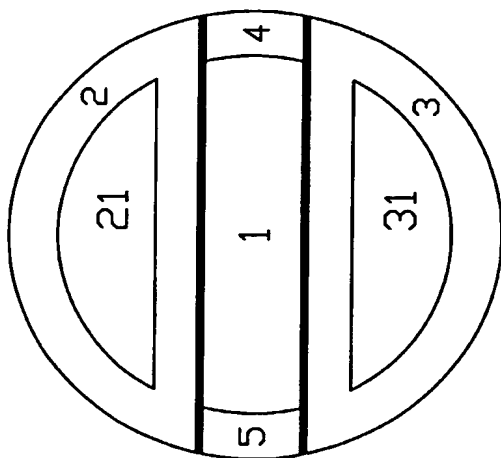


Fig. 2

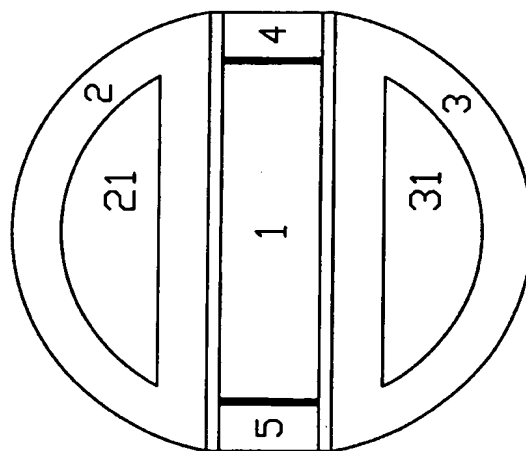


Fig. 4

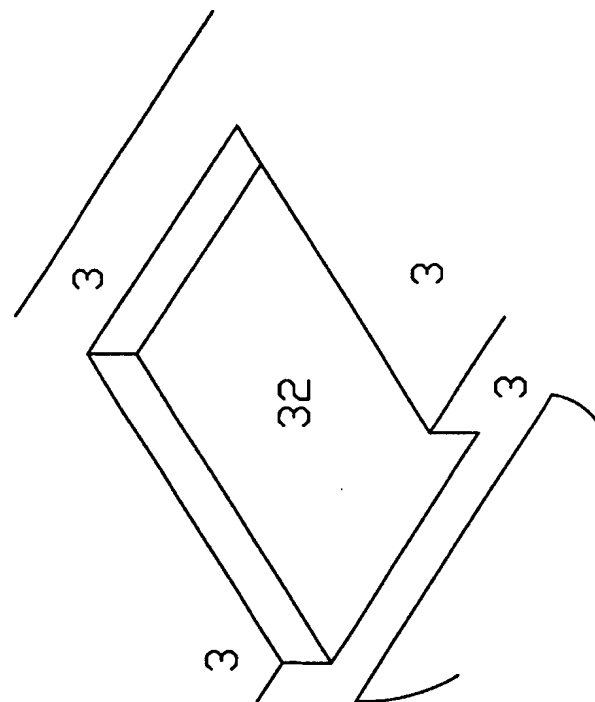


Fig. 6B

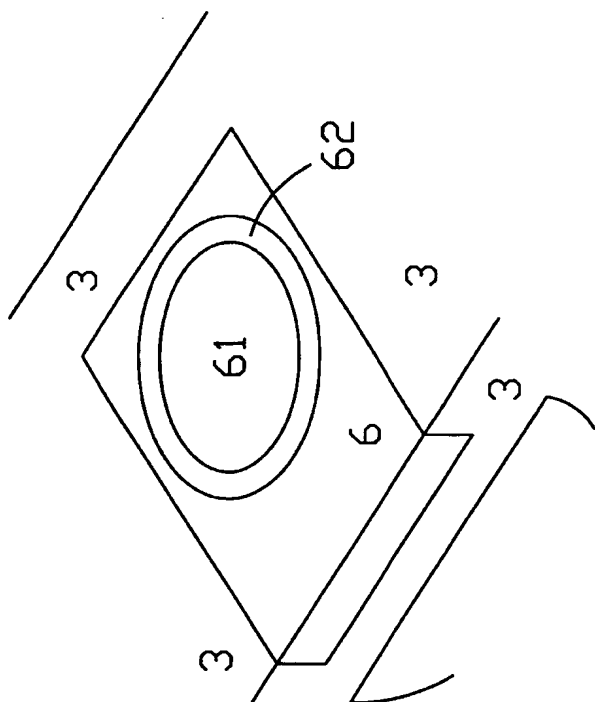


Fig. 6A

INTERNATIONAL SEARCH REPORT

International application No
PCT/IT 02/00773

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 C23C16/46 C30B25/12 C30B25/10 C30B31/12 H05B6/02
F27B14/06 H01L21/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 C23C C30B H05B F27B H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, EPO-Internal, IBM-TDB

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 02 38839 A (AIXTRON AG ;KAEPPELER JOHANNES (DE); WISCHMEYER FRANK (DE); BERGE) 16 May 2002 (2002-05-16)	1-3,7, 14-17, 25,26
Y	the whole document	3,4, 9-11,14, 16,18,19
Y	US 5 792 257 A (JANZEN ERIK ET AL) 11 August 1998 (1998-08-11) cited in the application column 4, line 9 - line 43	4,5
Y	US 4 794 217 A (LI ZHI JIAN ET AL) 27 December 1988 (1988-12-27)	18
Y	column 7, line 7 -column 8, line 36; figures 5-7	3,5, 9-11,14, 16,20

	--- --	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *Z* document member of the same patent family

Date of the actual completion of the international search

1 August 2003

Date of mailing of the international search report

07/08/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Ekhult, H

INTERNATIONAL SEARCH REPORT

Internati ublication No
PCT/IT 02/00773

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 02 38838 A (AIXTRON AG ;KAEPPeler JOHANNES (DE); WISCHMEYER FRANK (DE); BERGE) 16 May 2002 (2002-05-16) figure 2 ---	19,20
A	US 5 695 567 A (NILSSON ROGER ET AL) 9 December 1997 (1997-12-09) cited in the application column 6, line 45 - line 65 ---	1-26
A	GB 1 458 222 A (ELECTRICITY COUNCIL) 8 December 1976 (1976-12-08) figure 1 -----	1-26

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IT 02/00773

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
WO 0238839	A	16-05-2002	DE	10055182 A1	29-05-2002
			AU	1056702 A	21-05-2002
			WO	0238839 A1	16-05-2002
US 5792257	A	11-08-1998	DE	69604383 D1	28-10-1999
			DE	69604383 T2	05-01-2000
			EP	0807191 A1	19-11-1997
			JP	10513146 T	15-12-1998
			WO	9623913 A1	08-08-1996
US 4794217	A	27-12-1988	CN	85100131 A	23-07-1986
			CN	87202679 U	13-01-1988
WO 0238838	A	16-05-2002	DE	10055033 A1	08-05-2002
			AU	1824802 A	21-05-2002
			WO	0238838 A1	16-05-2002
US 5695567	A	09-12-1997	WO	9731133 A1	28-08-1997
			DE	69709955 D1	28-02-2002
			DE	69709955 T2	07-11-2002
			EP	0956376 A1	17-11-1999
			JP	2000505410 T	09-05-2000
GB 1458222	A	08-12-1976	NONE		